

# 12AYM-WET

**H-rating** 1140kW (1550mhp)  
**M-rating** 1220kW (1659mhp)

# YANMAR




- V-type, 12-cylinder, direct injection, heat exchanger cooling.
- Turbocharger + intercooler.
- 4-valves per cylinder for higher combustion efficiency.
- Conform to IMO Tier II emissions regulations.

## Specifications


Model	12AYM-WET H-rating / M-rating	
Number of cylinders	12 V-type	
Bore × stroke	mm	155 × 180
Displacement	lit.	40.76
Rated output	kW/hp/rpm	H : 1140(1550)/1840
		M : 1220(1659)/1900
Combustion system	Direct injection	
Aspiration	Turbocharger + intercooler	
Starting system	Electric starting motor (24V-6.5kW)×2 or air motor×2	
Cooling system	Constant high temperature cooling system	
Size of flywheel housing and flywheel	SAE #00 and 21 in.	
Dry mass	kg	4870 (without Fresh water cooler)
Dimensions (L×W×H)	mm	2615×1645×1708

## Dimensions Unit:mm

Engine only / Front view

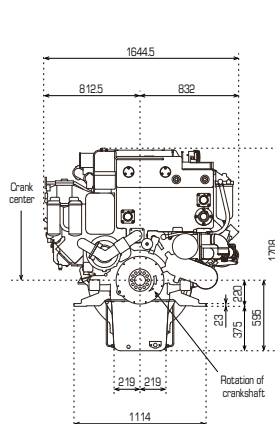

Engine only / Right side view

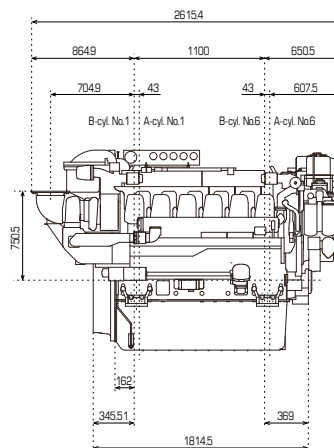

## Performance curves

